



Spray adhesives have now become a thing of the past! The new SAERfix has arrived: It's compatible with all common resin systems, has an improved adhesive formula and offers better resistance to osmosis. Non-crimp fabrics containing SAERfix are self-adhesive – the optimal solution for laying up and positioning multiaxial fabrics in the mold.

1 Self-adhesive: Time savings of over 50 % compared to a spray can

No time wasted for applying adhesive // reduces production costs

2 New adhesive formula for easier draping and

- up to 10 times longer hold
 Improved, long-lasting self-adhesive properties thanks
 to the new SAERfix adhesive formula // proven for
 draping into vertical molds // ideal for RTM
- Reproducible quality unachievable with spray cans
 Uniformly applied amounts of adhesive // laminate

has better mechanical characteristics compared to manual application with spray adhesive // fibers remain better stretched in the non-crimp fabric // no subsequent slipping or wave formation // multiple adhesion

- 4 Compatible with all common resin systems
 Works with UP, EP and VE resins // no need
 to keep double stock // no risk of confusion
- Sustainable for the environment and for your team
 No environmental pollution, no aerosols, no strong
 odors due to spray mist // no solvents // classified as
 "not hazardous to water"
- 6 Improved resistance to osmosis
 2 x longer resistance in warm water at 60 °C //
 Improved long-term performance of the laminate









ILSS behavior Strength (MPa) - between 2 plies Q-E-SF-1250 MPa 40 35 30 25 20 15 10 5 35 40 0 Polyester Vinyl ester resin resin

New **SAER**fix®

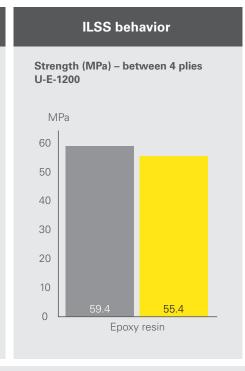

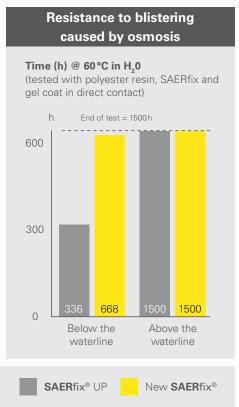

Technical Data	SAER fix [®]	
Resin compatibility	polyester/vinyl ester/epoxy	
Process	RTM, RTM light, Vacuum Infusion, VAP	
Finish	adhesive applied to one or both sides	
Standard adhesive GSM	5g/m²	
General application	As self-adhesive reinforcing material	On fleece
Non-crimp fabrics	glass, carbon*, flax	_
Other materials	SAERcore®, SAERflow®	glass, polyester
Standard widths	up to 1270 mm	up to 1270 mm
Other sizes	individual widths and lengths on request	individual widths and lengths on request

New **SAER**fix®

Reference

SAERfix® UP



^{*}available from Q4/2023